


- Sounder & Beacon with single installation point
- Ultra low current consumption – LED technology
- Alert and alarm function
- 32 user selectable tones
- Two stage alarm
- Alert and alarm function
- IP65 rated
- Supplied complete with sealed gland and 3m cable
- Compatible with alarm output of WS-15A Display
- Configurable via WS-15A Display as either high or low wind speed alarm
- An alternative to an audible or beacon alarm
- Suitable for indoor and outdoor use



DESCRIPTION

The alarm sounder with flashing beacon alarm unit is supplied with 3m of cable to connect to the WS-15A display unit. When connected to the WS-15A Display, the wind speed alarm is configurable as either a high or a low alarm and to avoid false alarm events, there are adjustable hold off and hold on times as shown below:

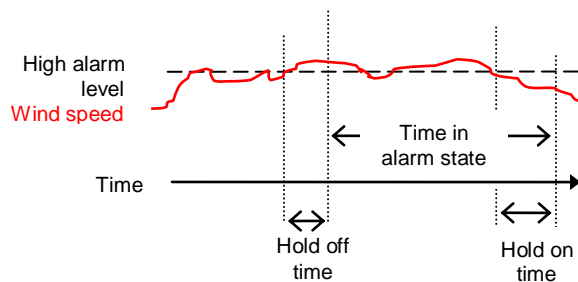

The unit can be surface mounted via fixing screws. Alternatively, optional magnetic feet may be used for quick mounting (at an additional cost).

SPECIFICATION

Physical	Mounting	Surface mounted
	Dimensions	Diameter: 93mm
		Depth: 110mm
	Material	ABS plastic enclosure, PC lens
	Weight	0.35 kg (including 3m cable)
Colour	Red	
Output	Flash Colour	Red
	Flashing frequency	1 per second
	Light	>0.5Cd
	Sound	101dB(A) (Typical Tone 3)
	Volume control	20dB
Power	Sound tones	32
	Power requirements	19mA at 9-28Vdc (Typical Tone 3)
Environmental	Connection	Internal terminals
	Operating temperature	-10 to +55 °C
	Sealing	IP65 rated

The manufacturer reserves the right to amend the specification and therefore the information in this document may be subject to change. Please check our website www.r-p-r.co.uk for details

Richard Paul Russell Ltd

The Lodge, Unit 1 Barnes Farm Business Park, Barnes Lane, Milford on Sea, SO41 0AP, UK
 tel +44 (0) 1590 679755 fax +44 (0) 1590 688577 e-mail: sales@r-p-r.co.uk web: www.r-p-r.co.uk